




febi.Truck

febi 102874

to fit:

MAN Bus, F90, TGA, TGS, TGX

Repl. no. 51.08150.6176

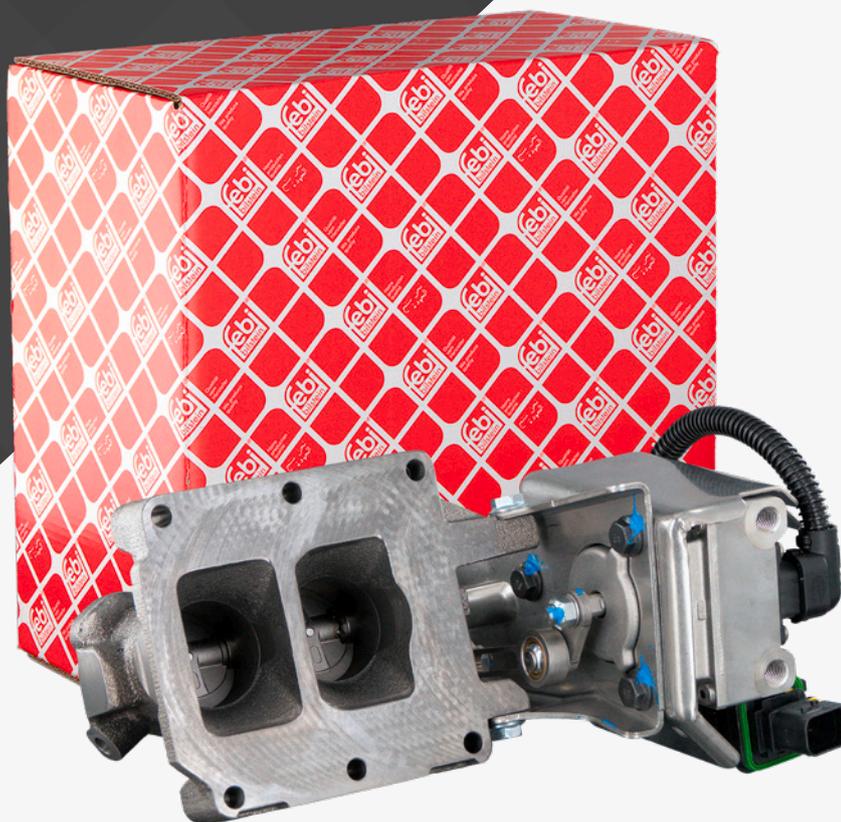

EGR VALVE

In order to comply with current exhaust emission standards and their limit values, exhaust gas purification systems, such as SCR or exhaust gas recirculation systems, are required. However, problems with the EGR valve are more frequent in exhaust gas recirculation systems. Oil residues and soot deposits can block the valve. In this case, control of the exhaust gas recirculation is only possible to a certain extent or not at all. The warning light for the exhaust system signals to the driver that there is a fault and that a workshop must be visited. Cleaning the EGR valve does not always eliminate the fault. If that is the case, only the exchange remains.

Note: Oil residues and soot deposits are often a result of oil leaks, e.g. on the turbocharger or cylinder head. If these leaks are not repaired, the same problem can occur again after a short time.

For more technical information please visit: partsfinder.bilsteingroup.com