



FLEETRANNER™ STRAIGHT SILICONE HOSE

PRODUCT TYPE: COOLING SYSTEMS

RECOMMENDED FOR: Long-lasting service as radiator, heater, and coolant transfer hose in poorly-ventilated conditions. Ideal for heavy-duty applications on buses, trucks and off-road equipment. The extra thick and resilient wall prevents cold-water leaks and hardening under heat.

RESISTANT TO: Resistant to the harmful conditions under the bonnet; lubricating oil, ozone, weathering and a variety of coolants. OAT resistant.

CONSTRUCTION:





- SHAPE:** Straight
- TUBE:** Silicone
- REINFORCEMENT:** Synthetic Fibre
- WIRE:** -
- COVER:** Silicone

STANDARDS:

- SAE NORM** SAE 20R1 class A, standard wall

DIN NORM -


TEMPERATURE:

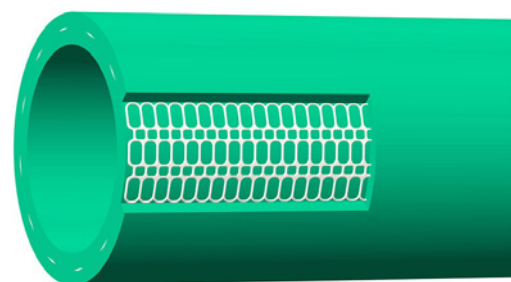

	PN									
		mm	"	mm	m	mm	bar	bar	mm/HG	#
SH10X1	4171-20100	10	3/8	20	1	100	10.9	61	254	4
SH13X1	4171-20130	13	1/2	23	1	146	9.7	48	254	4
SH16X1	4171-20160	16	5/8	26	1	152	8.6	41	203	4
SH19X1	4171-20190	19	3/4	29	1	158	7.5	41	203	4
SH22X1	4171-20220	22	7/8	32	1	164	7.5	34	177	4
SH25X1	4171-20250	25	1	35	1	170	6.8	24	177	4
SH28X1	4171-20280	28	1 1/8	38	1	218	6.8	24	152	4
SH32X1	4171-20320	32	1 1/4	42	1	224	6.3	16	127	4
SH35X1	4171-20350	35	1 3/8	45	1	350	6.3	15	101	4
SH38X1	4171-20380	38	1 1/2	48	1	362	5.7	13	76	4
SH40X1	4171-20400	40	1 9/16	50	1	370	5.7	12	54	4
SH42X1	4171-20420	42	1 5/8	52	1	378	5.1	12	50	4
SH45X1	4171-20450	45	1 3/4	55	1	390	5.1	12	25	4
SH50X1	4171-20500	50	2	60	1	410	4.6	12	-	4
SH55X1	4171-20550	55	2 3/16	65	1	430	4	12	-	4
SH60X1	4171-20600	60	2 3/8	72	1	430	4	12	-	4
SH63X1	4171-20630	63	2 1/2	75	1	430	3.4	9	-	4
SH70X1	4171-20700	70	2 3/4	82	1	430	2.8	8	-	4
SH75X1	4171-20750	75	3	87	1	430	2	8	-	4
SH80X1	4171-20800	80	3 1/8	92	1	430	1.8	7	-	4



FLEETRANNER™ STRAIGHT SILICONE HOSE



	PN									
		mm	"	mm	m	mm	bar	bar	mm/HG	#
SH83X1	4171-20830	83	3 1/4	95	1	430	1.7	7	-	4
SH89X1	4171-20890	89	3 1/2	101	1	430	1.7	7	-	4
SH95X1	4171-20950	95	3 3/4	107	1	430	1.1	7	-	4
SH102X1	4171-20102	102	4	114	1	430	1.1	7	-	4
SH106X1	4171-20106	106	4 1/4	118	1	430	1.1	7	-	4
SH110X1	4171-20110	110	4 5/16	122	1	430	1.1	7	-	4
SH114X1	4171-20114	114	4 1/2	126	1	430	1.1	5	-	4