

K-LED 50 LED BEACON FIXED MOUNT



OPERATION

RED: To +VDC

BLACK: To Chassis Ground (-)

YELLOW: Flash patterns & Synchronization

Connect YELLOW wires of all heads together for synchronization

All heads must be set at the same pattern

Momentarily apply +VDC to YELLOW wire:

once for next pattern


quickly 3 times for reset

Note: Make sure to cover all unused bare wires.


Flash Pattern #	Flash Patterns
1	Double (2Hz)
2	Single (2Hz)
3	Quad (2Hz)
4	Single
5	Double
6	Quad
7	Quint
8	Mega
9	Ultra
10	Single-Quad
11	Single H/L
12	Steady

Note: This unit may not be factory set at Flash Pattern #1.

3 Bolt Mount



1" Pipe Mount






K-LED 50 LED BEACON TEMPORARY MOUNT

FLASH PATTERN CHANGE

Magnetic Mount



1. Open Beacon

Twist dome counter-clockwise **B**, then lift dome to open.


2. Change Pattern

Momentarily push red button 2, to change to next flash pattern. (see flash pattern chart)

3. Close Beacon

Align dome indent with the base , then twist clockwise to close.

DIN Mount

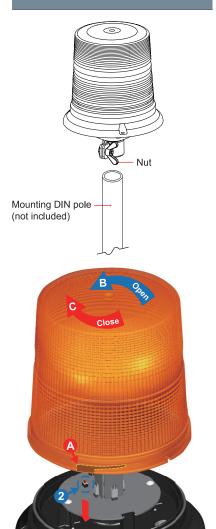

WARNING: It is not recommended to use magnetically mounted warning devices on the outside of vehicles in motion. Usage is at the sole risk and responsibility of the user.