

## Anziehvorschrift Zylinderkopf

## Tightening Instructions for Cylinder Head

## Instructions de serrage pour culasse

## Prescripciones de apriete para culatas

308.083


passend für / suitable for  
adaptable à / adaptable a

Porsche




Das Original

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo

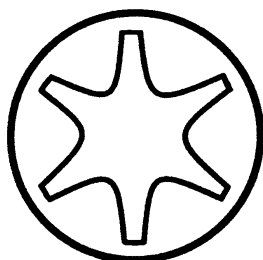

872.290  
M 12x1,5x140

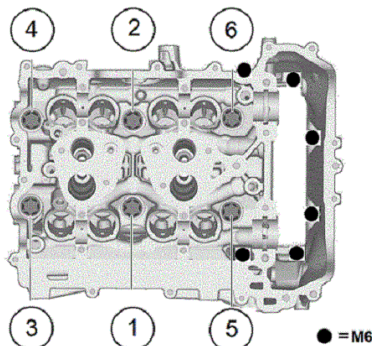

Anziehen/  
Tightening/  
Serrage/  
Apriete

M12 x 1,5 x 140  
● 5 Nm  
50 Nm  
□ 360° lösen / loosen  
4 Nm  
12 Nm  
➤ 65°  
➤ 60°  
➤ 65°  
➤ 60°

M6 x 65  
● 5 Nm  
➤ 70°  
M6 x 25  
● 5 Nm  
➤ 45°

Zeichenerklärung / Explanations / Explication / Explicacion

|  |                                                |                                 |                                   |                                          |
|--|------------------------------------------------|---------------------------------|-----------------------------------|------------------------------------------|
|  | neue Zylinderkopf-<br>schrauben verwenden      | use new cylinder head<br>bolts  | utiliser des vis neuves           | emplar tornillos nuevos                  |
|  | Warmlauf (80°C)                                | warm up time (80°C)             | chauffage (80°C)                  | calentamiento (80°C)                     |
|  | Schrauben einzeln lösen<br>und wieder anziehen | loosen and tighten each<br>bolt | deserrer et serrer<br>vis par vis | aflojar y apretar<br>tornillo a tornillo |
|  | Setzzeit                                       | relaxation time                 | durée de tassement                | tiempo de espera                         |
|  | Drehwinkel                                     | torque angle                    | angle de serrage                  | ángulo de giro                           |

## Motortyp / Engine type / Type de moteur / Tipo de motor

2,5 Cyl. 3-4 / Ø 104,3 mm

Mot. 257 KW (350 PS)

718 Boxster S

718 Cayman S

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

[service@elring.de](mailto:service@elring.de)

24/01/22

**\*308.083\***